



国内首创
国际一流

Type BB
STAINLESS-STEEL PUMPS
不锈钢离心泵

Type BB不锈钢离心泵

用途 Applications

本泵全扬程不过载。
本泵适用于工业液体,家庭应用,清洗系统,游泳池和农业灌溉等清水介质的输送,也可以适用于中度腐蚀性液体和乙二醇溶液或其他液体的输送(需经销人员的确认)。
输送液体介质温度:-15℃~+80℃
最大工作压力: 8 bar

This pump can be used at full head without overloading motor.
The pumps are suitable for transporting clean water and light corrosive liquid, glycol solution and other liquid which must be allowed by dealer. The pumps can be applied on Industrial applications, domestic, washing, pool, and irrigation etc.
Liquid temperature:-15℃~+80℃
Max. working pressure:8bar


电机 Motor


转速:2900r/min 绝缘等级:F
防护等级:IP55
额定功率:0.55~3kw 频率: 50Hz
电压: 单相220V 三相380V
单相电机加有热保护器
外殼材料/底座/支架:铝
使用环境温度范围:-15℃~+40℃
Speed:2900r/min
Insulation Class:F
Protection Class:IP55
Rating Power:0.55~3kW 0.75~4HP
Frequency:50Hz Voltage:220V 380V
With overload protector in singal phase motor
Motor jacket/base/adapter:Aluminium
Ambient temperature range:-15℃~+40℃

材质 Materials

泵殼、后盖、叶轮及泵轴采用SUS304材料
Casing, impeller,back cover and pump shaft:SUS304 material.

型号说明 Symbols

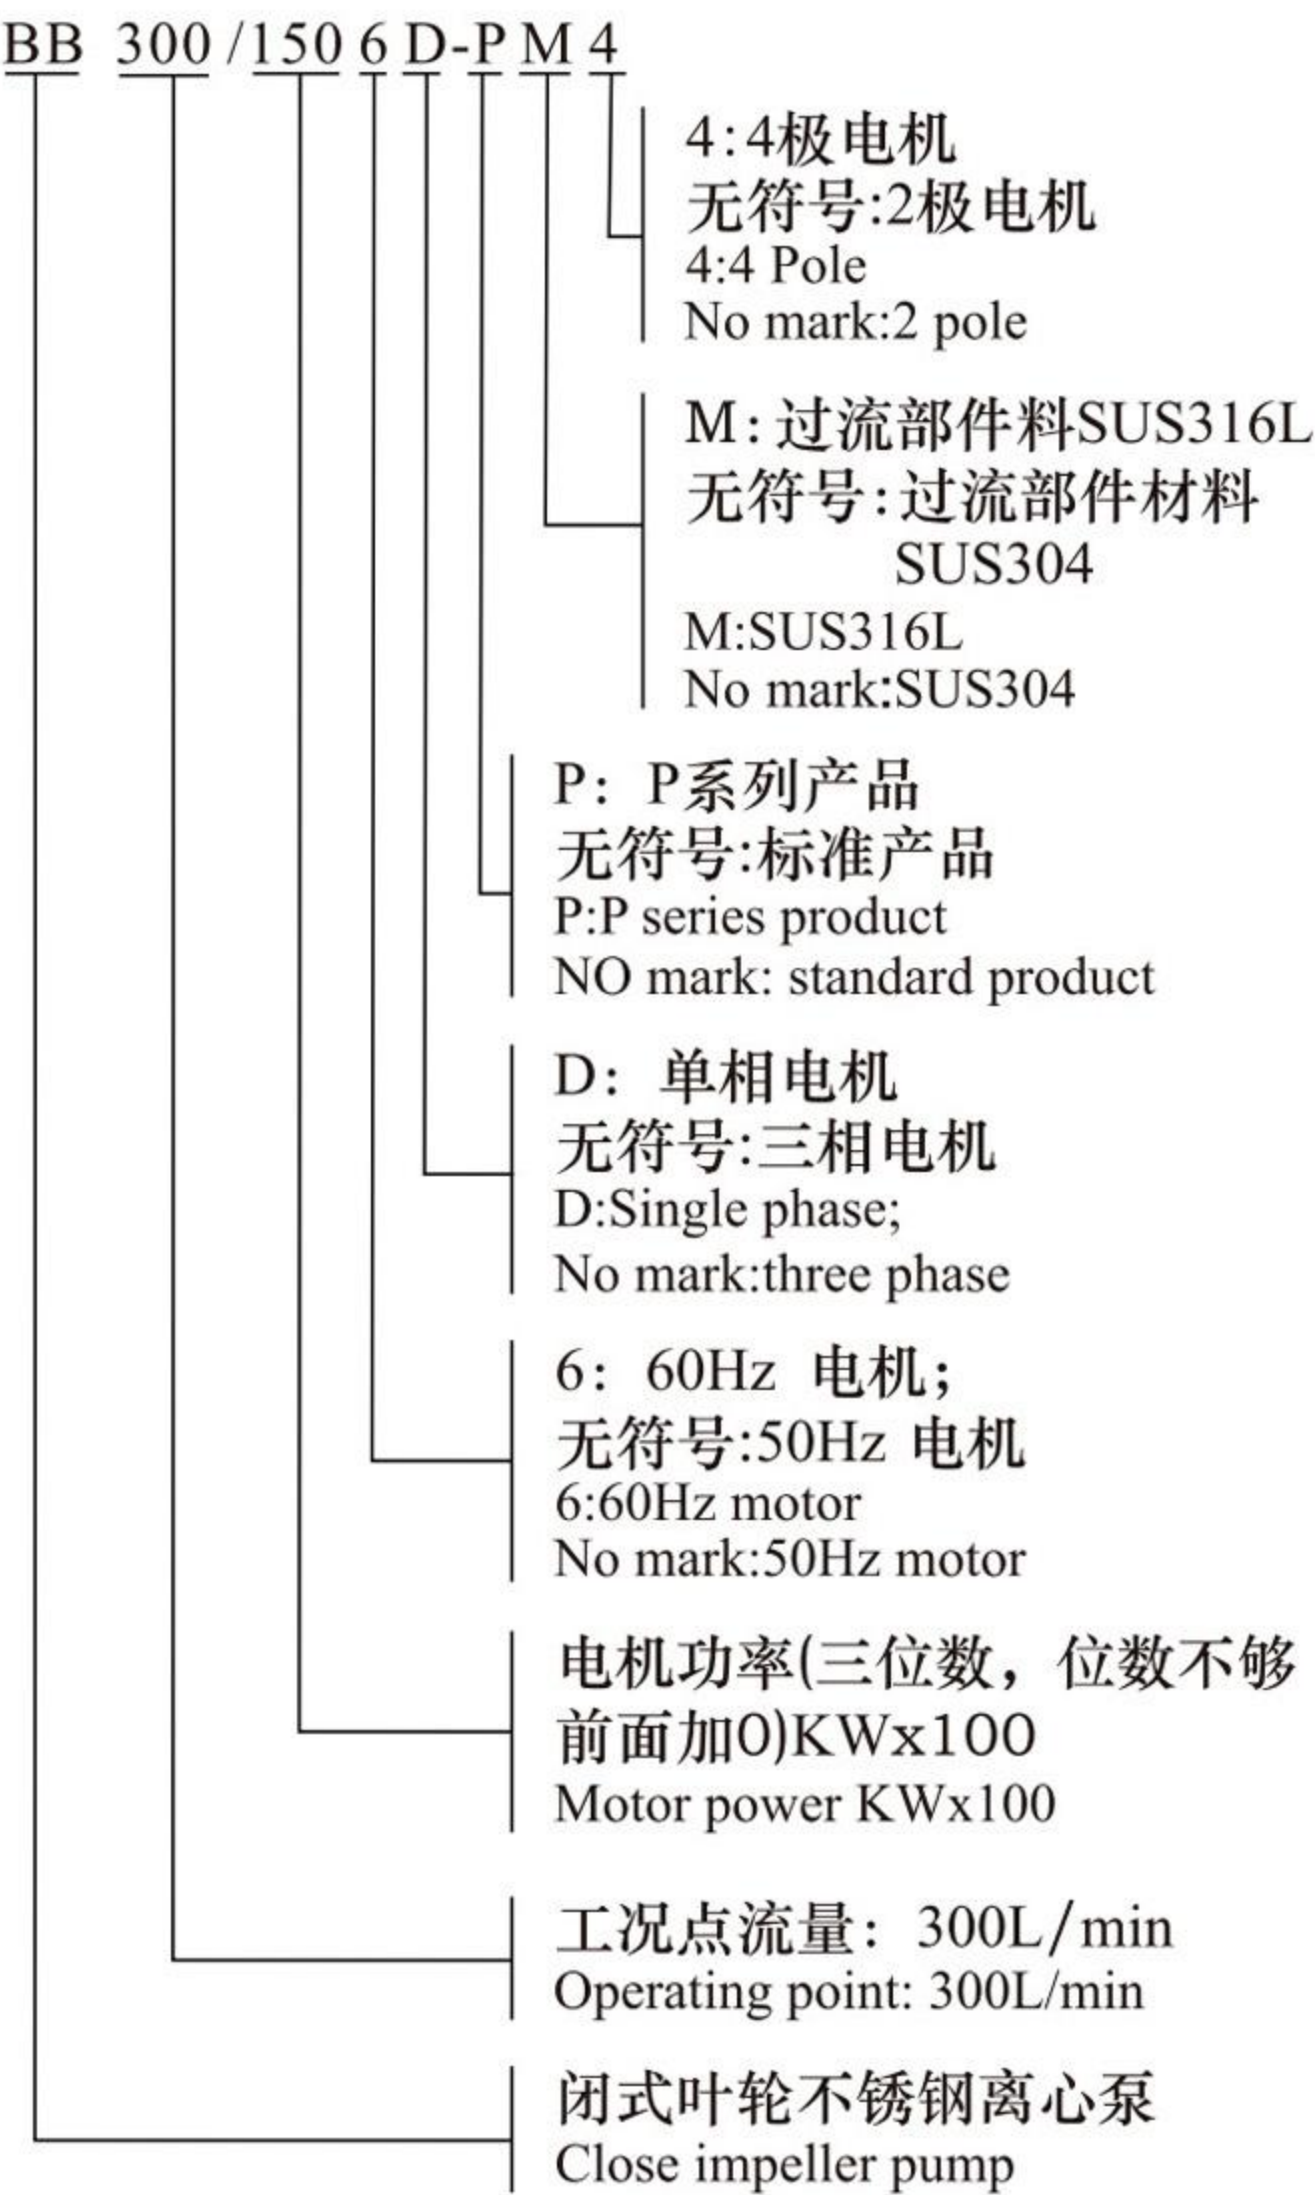

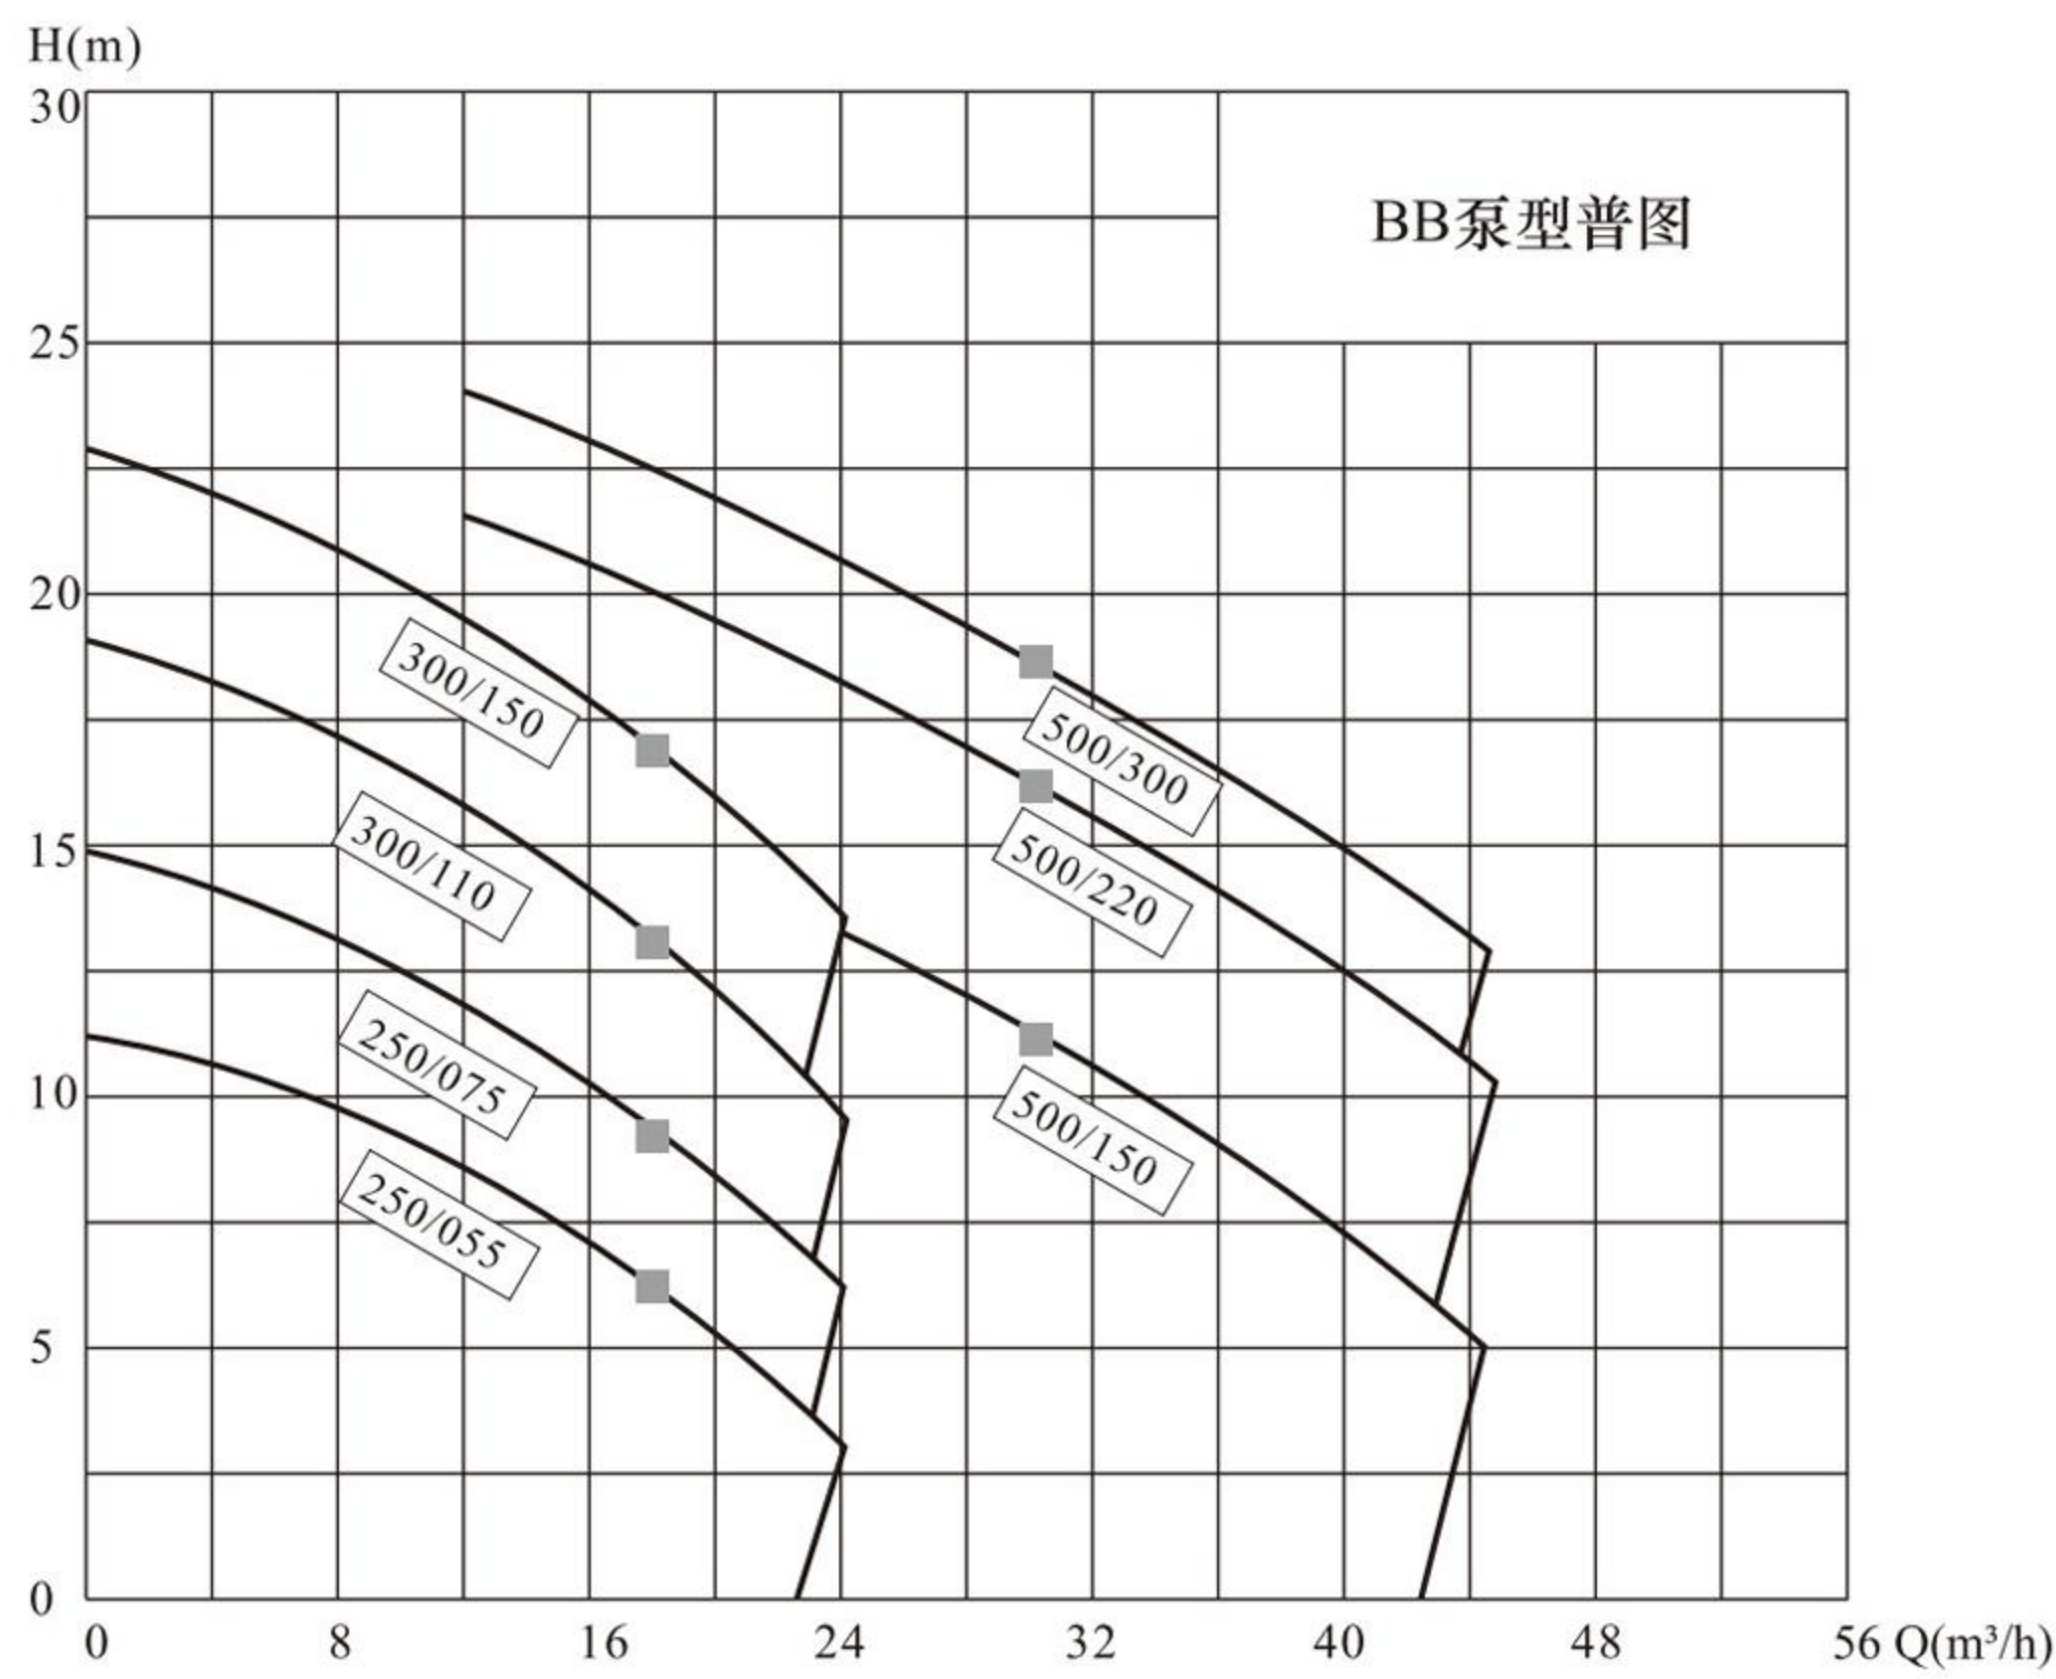


使用范围性能参数表 Operating Performance Data

n=2900rpm



型号 Model		功率 Power		流 量 Capactiy							
单相 Single phase 220V 50Hz	三相 Three phase 380V 50Hz	千瓦 KW	马力 HP	m³/h	6	12	18	24	30	36	42
				l/min	100	200	300	400	500	600	700
				扬 程 Head(m)							
BB250/055D	BB250/055	0.55	0.75		10.5	9	7	3	—	—	—
BB250/075D	BB250/075	0.75	1.0		14.5	13	10	6	—	—	—
BB300/110D	BB300/110	1.1	1.5		18.5	16.5	13.5	9.5	—	—	—
BB300/150D	BB300/150	1.5	2.0		22.5	20.5	17.5	13.5	—	—	—
BB500/150D	BB500/150	1.5	2.0		—	16	15	13.5	11.5	9.5	6
BB500/220D	BB500/220	2.2	3.0		—	21.5	20	18.5	16.5	14.5	11.5
—	BB500/300	3.0	4.0		—	24	22.5	21	19	17	14

泵体部件表 Parts List:

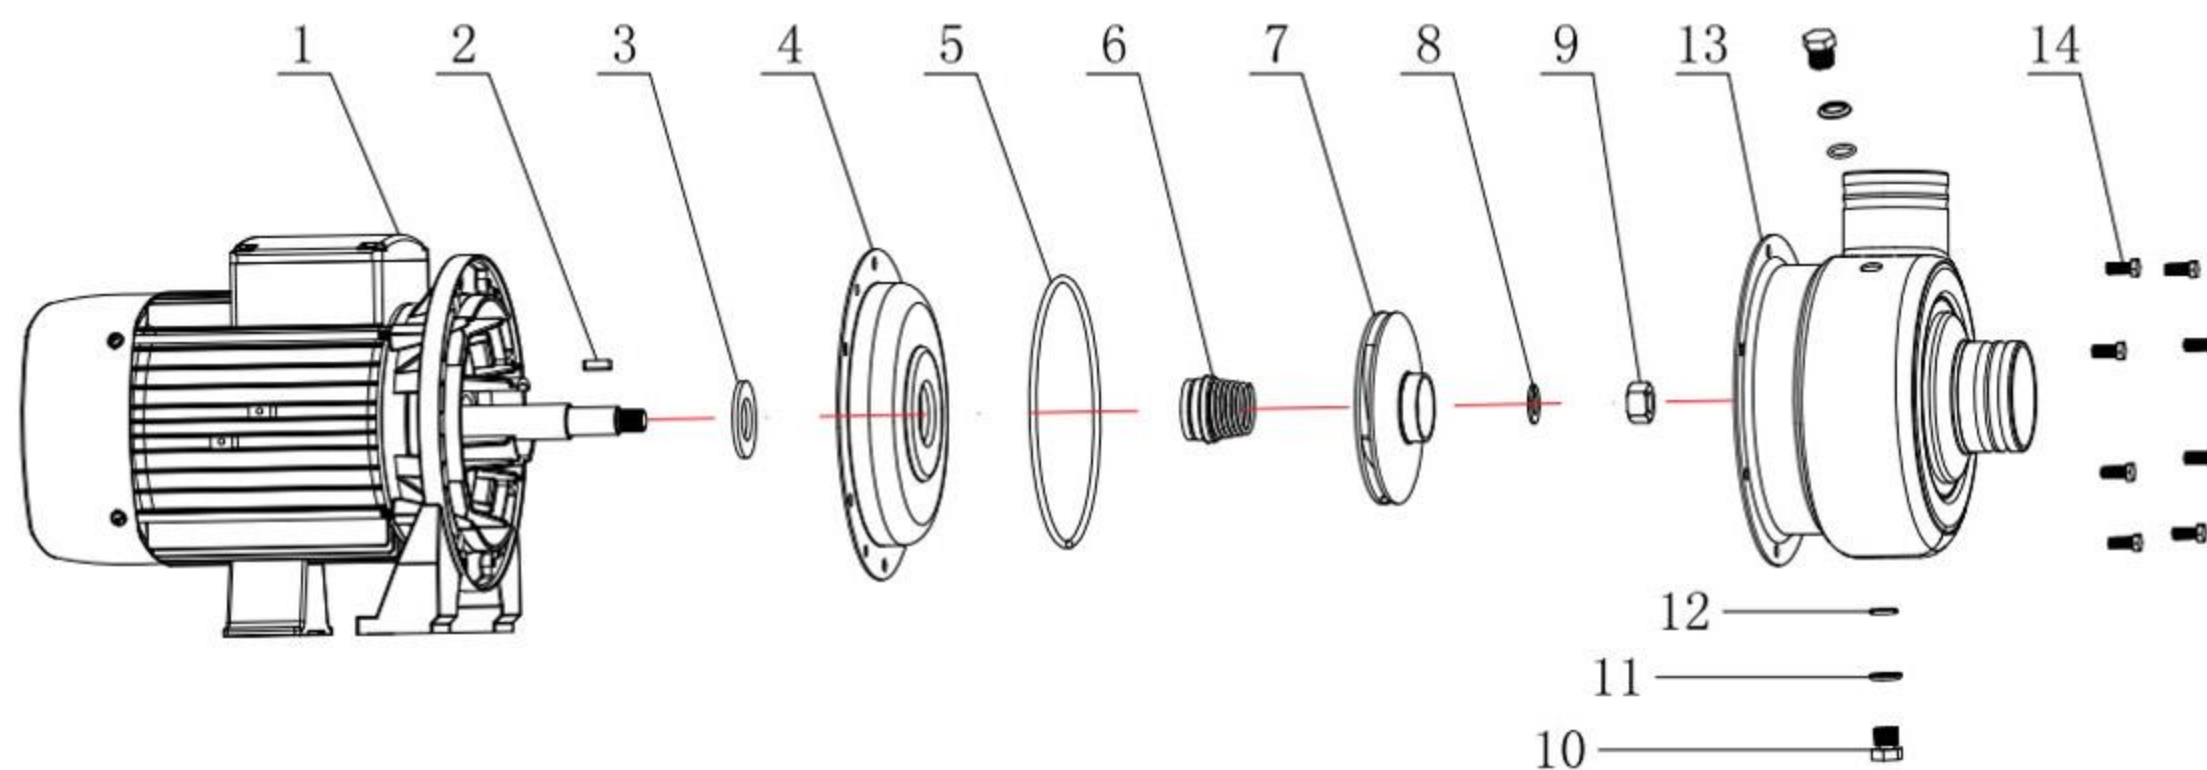

序号 No	部件名称 Description	序号 No	部件名称 Description	序号 No	部件名称 Description	序号 No	部件名称 Description	序号 No	部件名称 Description
1	电机 Motor	4	后盖体 Back cover	7	叶轮 Impeller	10	灌排水孔螺钉 Priming/Drain bolt	13	泵体 Casing
2	平键 Key	5	O形圈 O Ring	8	弹簧垫圈 Spring Washer	11	凹型垫圈 "L" Washer	14	外六角螺钉 Screw
3	挡水圈组件 Slinger assembly	6	机械密封 Mechanical Seal	9	叶轮紧固螺母 Impeller Nut	12	O形圈 O Ring		

外形尺寸图 Outline Dimension

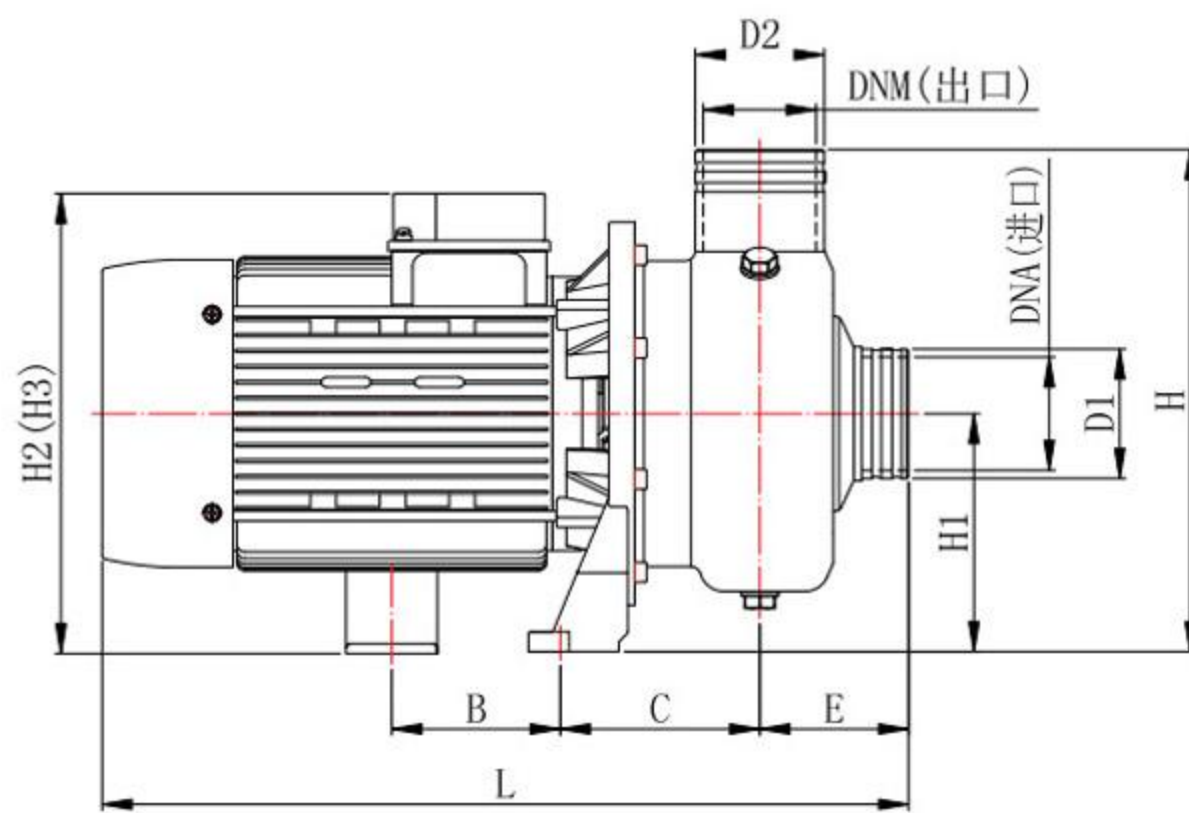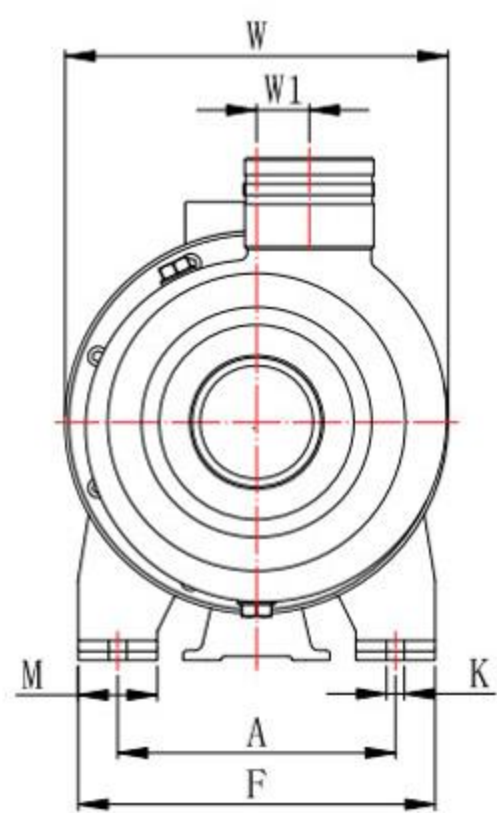

安装尺寸 Installation Dimension

型号 Model	A	B	C1	D1	D2	E	F	H	H1	H2	H3	K	L	M	W	W1	DNA	DNM
BB250/055D BB250/055	120	90	84	φ 52	φ 52	84	160	226	108	211	210	9	360	40	170	20	G1½	G1½
BB250/075D BB250/075	120	90	84	φ 52	φ 52	84	160	226	108	211	210	9	360	40	170	20	G1½	G1½
BB300/110D BB300/110	140	75	101	φ 63	φ 63	87	180	253	120	260	230	9	403	40	193	20	G2	G2
BB300/150D BB300/150	140	75	101	φ 63	φ 63	87	180	253	120	260	230	9	403	40	193	20	G2	G2
BB500/150D BB500/150	140	75	101	φ 63	φ 63	93	180	253	120	260	230	9	409	40	193	20	G2	G2
BB500/220D BB500/220	140	90	101	φ 63	φ 63	93	180	253	120	268	240	9	441	40	193	20	G2	G2
— BB500/300	140	90	101	φ 63	φ 63	93	180	253	120	—	240	9	441	40	193	20	G2	G2

注: H2为单相电机 H2 for motors on single phase, H3为三相电机 H3 for motors on three phase