



ZDK系列

产品特性：

绝缘等级：B级

防护等级：IP55

最大吸程：8米


工作条件：


介质：清水或物理化学性质类似于水的液体

介质温度：0~+50℃


最大工作压力：0.8MPa

型 号 Model	输出功率 Power(P ₂) kW	电 流 (Amps)		额定扬程 Rated head (m)	额定流量 Rated flow (m ³ /h)	入口 Inlet	出口 Outlet	毛重 G.W (Kg)	包装尺码 Packing size (mm)
		220V/50Hz	380V/50Hz						
1ZDK14(T)	0.33	2.4	1.0	9.5	5.4	G1	G1	10	355×180×285
1ZDK20(T)	0.55	4.2	1.4	13	6	G1	G1	13	375×215×325
1.5ZDK20(T)	0.75	5.2	1.8	15	8	G1½	G1½	14.5	375×215×325
2ZDK16(T)	0.75	5.2	1.8	13.5	13	G2	G2	16	405×210×320
2ZDK20(T)	1.5	9.6	3.5	17	19	G2	G2	29	460×210×370

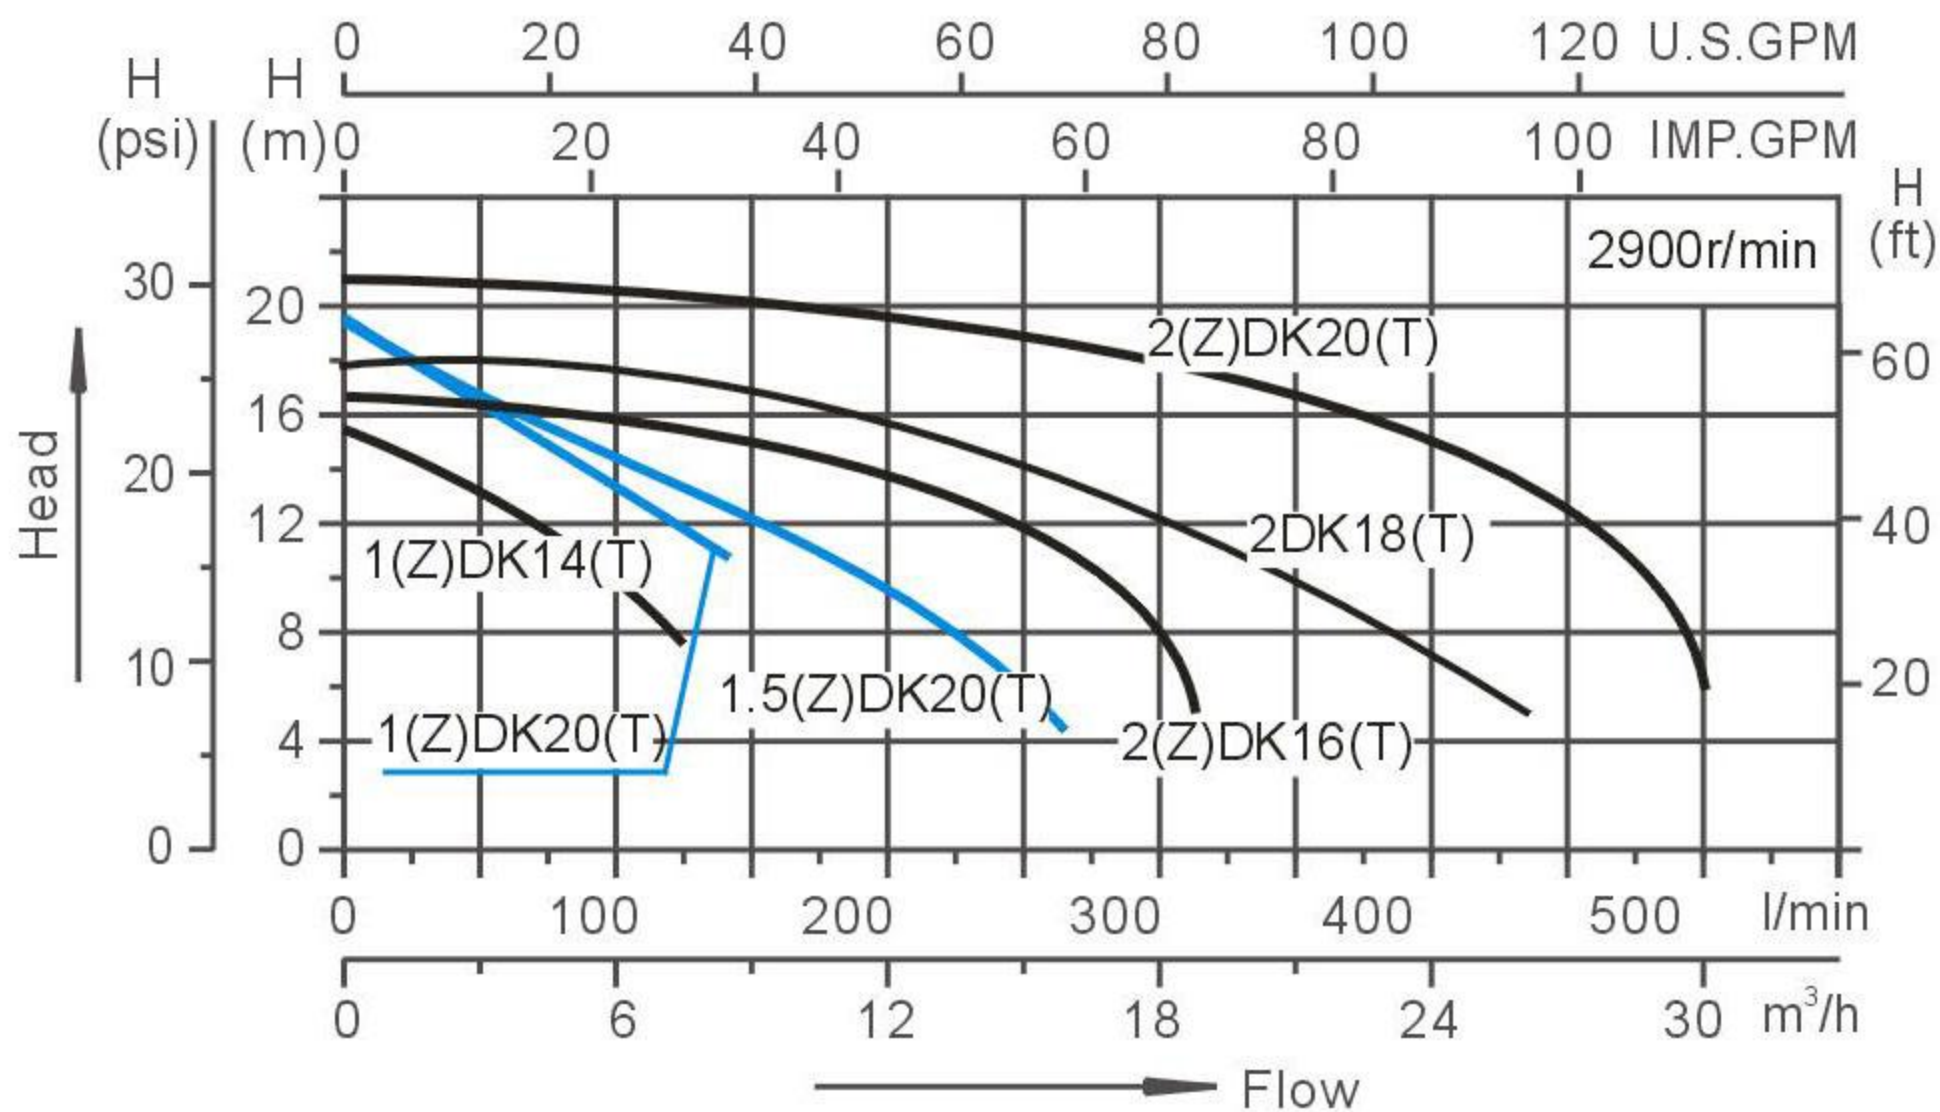

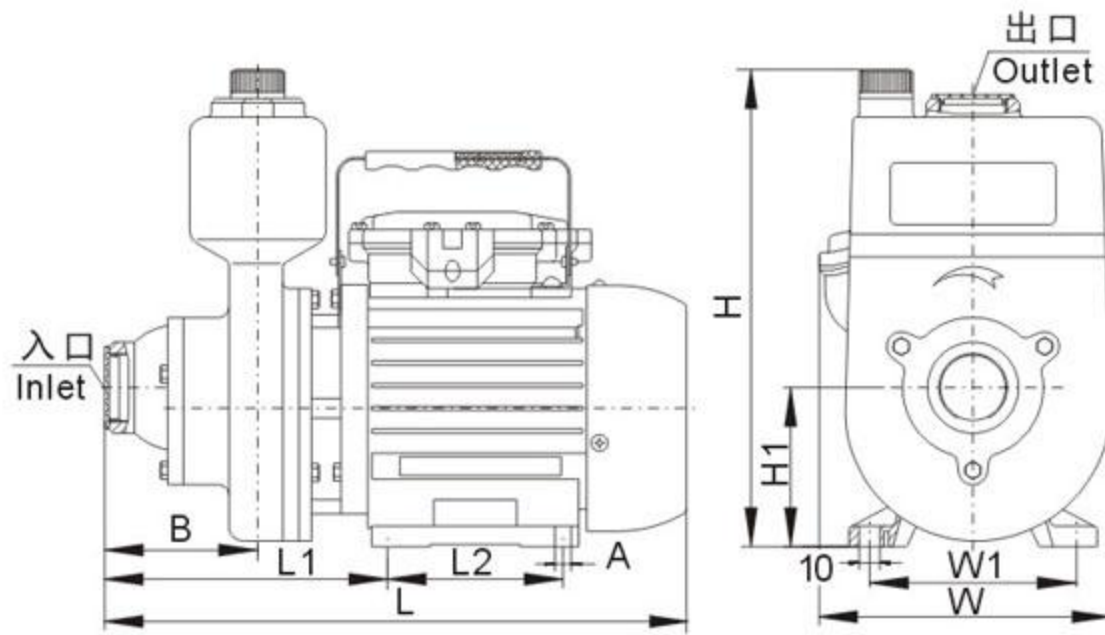

型号 Model	外形尺寸(mm)									
	A	B	L	L1	L2	W		W1	H	H1
						单相 single phase	三相 three-phase			
1ZDK14(T)	8	72	287	141.5	85	143	143	100	172	67
1ZDK20(T)	13	75.5	317	147.5	95	150	150	125	195	80
1.5ZDK20(T)	13	76.5	319	149.5	95	153	153	125	195	80
2ZDK16(T)	13	98.5	345	175.5	95	154	154	125	245	95
2ZDK20(T)	16	186	504	285.5	125	180	180	140	288	165

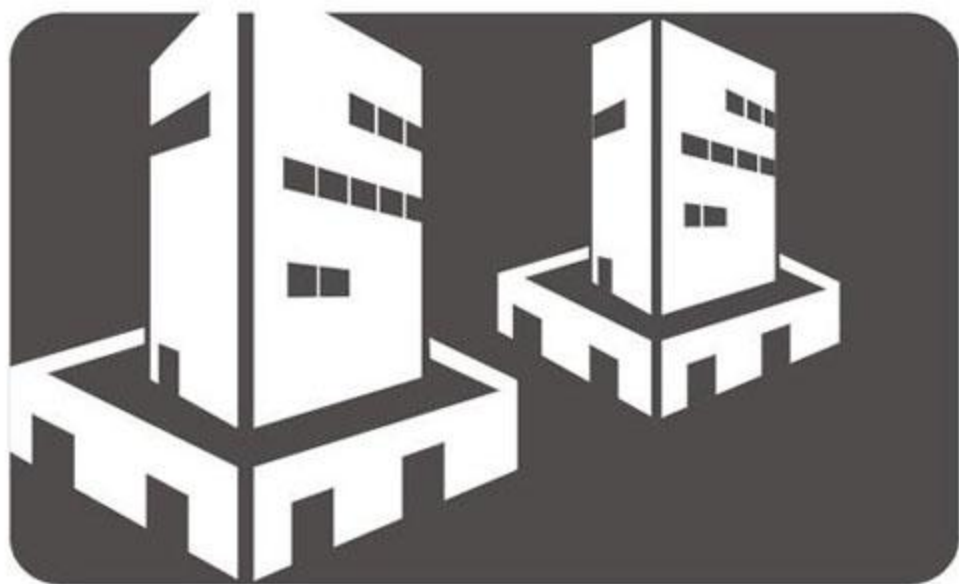

楼层增压供水

Floors of pressurized water supply

序号 NO.	名称 Name
1	防尘盖 Dust cap
2	六角头螺栓 Hexagon bolt
3	接头 Tie-in
4	止回阀 Check valve
5	泵壳 Pump Casing
6	螺塞 Plug
7	六角头螺母 Hexagon Nut
8	平键 Flat key
9	叶轮 Impeller
10	机械密封 Mechanical Seal
11	O形圈 O-Ring
12	平垫 Washer
13	六角头螺栓 Hexagon bolt
14	提手 Handle
15	电机 Motor

