



LP系列泳池泵

产品特性：

热保护器：带热保护器（单相机）

绝缘等级：F级

防护等级：IP55

工作条件：

介质温度：5~50℃

环境温度：≤50℃

最大工作压力：0.3MPa

泵体可以12点、9点、3点、1点半旋转，方便管道安装。


技术参数列表

Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P _I)		电流 (Amps)	接头尺寸 Fitting size (mm)	重量 (kg)	包装尺码 Packing size (mm)	装柜数量 (Qty/20')
				kW	HP					
LP150	520	12	220-240/50	1.1	1.5	5.8	60.3or63	12	420×235×280	1050
LP200	535	13	220-240/50	1.5	2.0	7.0	60.3or63	12.7	420×235×280	1050
LP250	600	15.5	220-240/50	1.85	2.5	8.0	60.3or63	14.6	420×235×280	1050
LP300	635	17	220-240/50	2.2	3.0	10	60.3or63	16.3	435×235×280	1013




性能曲线

Performance curves

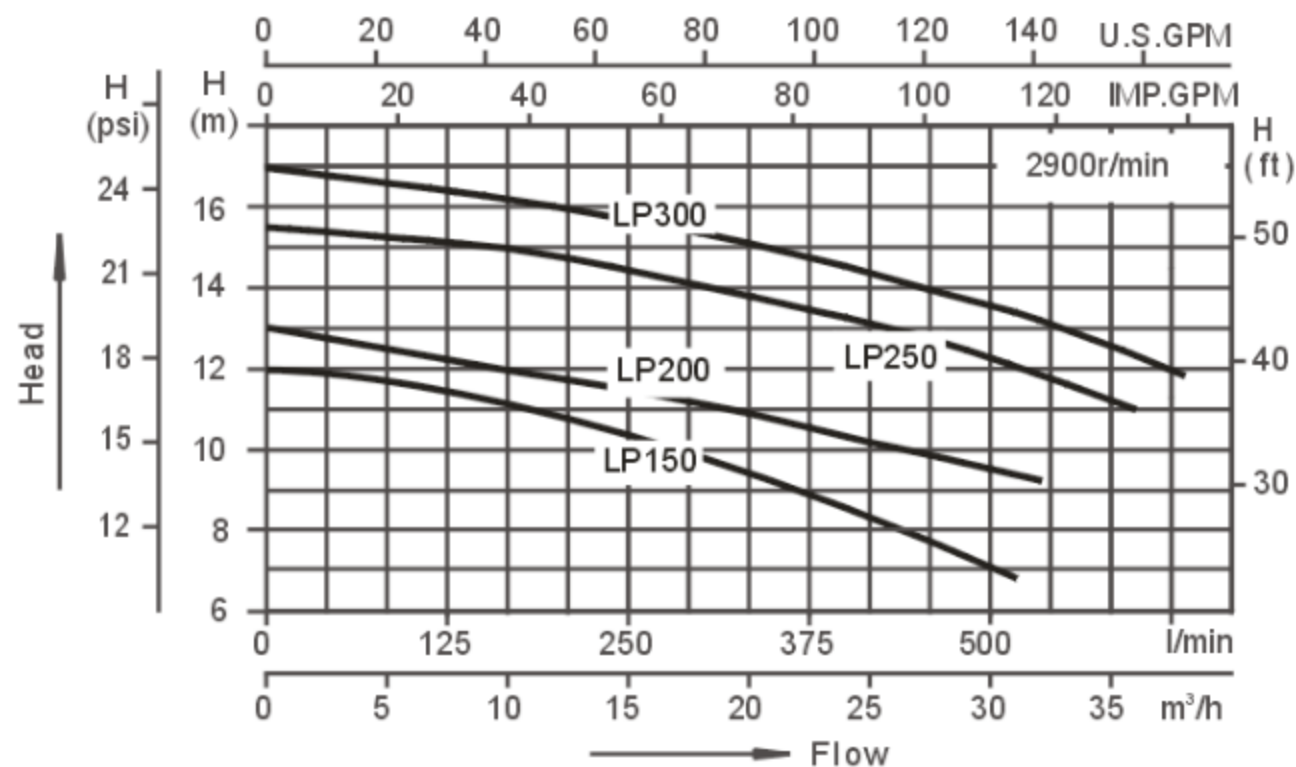

安装外形图

Overall dimension

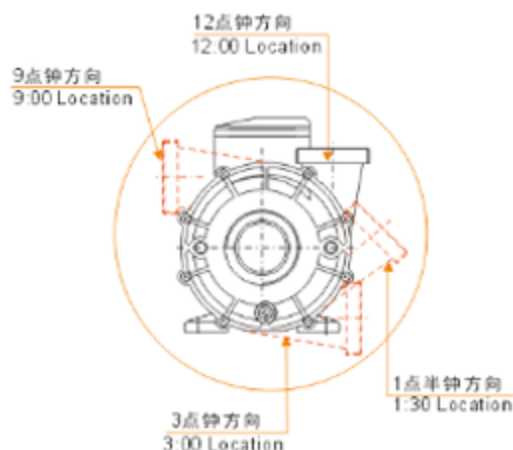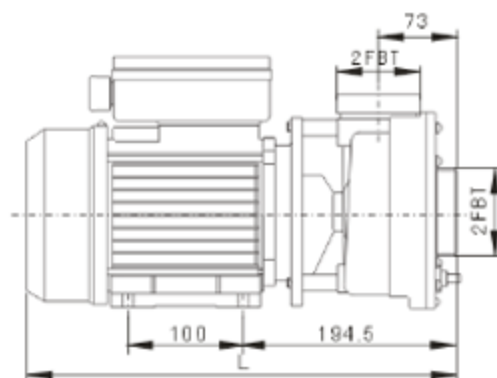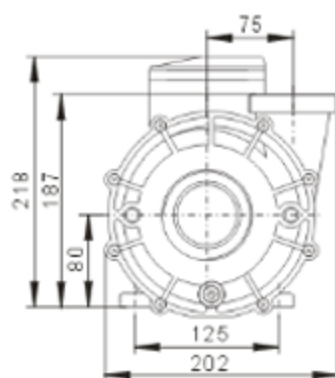

型号 Model	L
LP150	382
LP200	382
LP250	382
LP300	397

产品应用

Product applications



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

产品爆炸图

Exploded view

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接 头 Tie
3	O形圈 O-Ring
4	注放水螺塞 Hexagon Screw
5	O形圈 O-Ring
6	十字盘头螺钉组合件 cross raised head screw assembling
7	泵 盖 Pump Cover
8	O形圈 O-Ring
9	叶 轮 Impeller
10	机械密封 Mechanical seal
11	泵 壳 Pump Casing

序号 NO.	名称 Name
12	平垫圈 Plain washer
13	六角螺栓 Plastic spacer
14	电 机 Motor

