



WP系列

产品特性：

热保护器：带热保护器（单相机）

绝缘等级：F级

防护等级：IP55

工作条件：


介质温度：5~50℃




环境温度：≤50℃

最大工作压力：0.3MPa

泵体可以12点、9点、3点、1点半旋转，方便管道安装。

型 号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 Amps	接头尺寸 Fitting size (mm)	重量 (Kg)	包装尺码 Packing size (mm)	装柜数量 (Qty/20')
					kW	HP					
WP200-I	620	14	1	220-240/50	1.5	2.0	7.0	60.3or63	15.3	460×235×295	910
WP250-I	670	16	2	220-240/50	1.85	2.5	9.0	60.3or63	16.3	460×235×295	910
WP300-I	730	18	3	220-240/50	2.2	3.0	10	60.3or63	18	460×235×295	910
WP400-I	780	19	4	220-240/50	3.0	4.0	14	60.3or63	19.2	460×235×295	910
WP200-II	620	14	5 1	220-240/50	(Low speed)0.35	3/8	2.0	60.3or63	15.5	470×235×295	890
					(High speed)1.5	2.0	7.0				
WP250-II	670	16	6 2	220-240/50	(Low speed)0.4	1/2	2.5	60.3or63	17	470×235×295	890
					(High speed)1.85	2.5	9.0				
WP300-II	730	18	7 3	220-240/50	(Low speed)0.45	5/8	3.0	60.3or63	18.5	470×235×295	890
					(High speed)2.2	3.0	10				

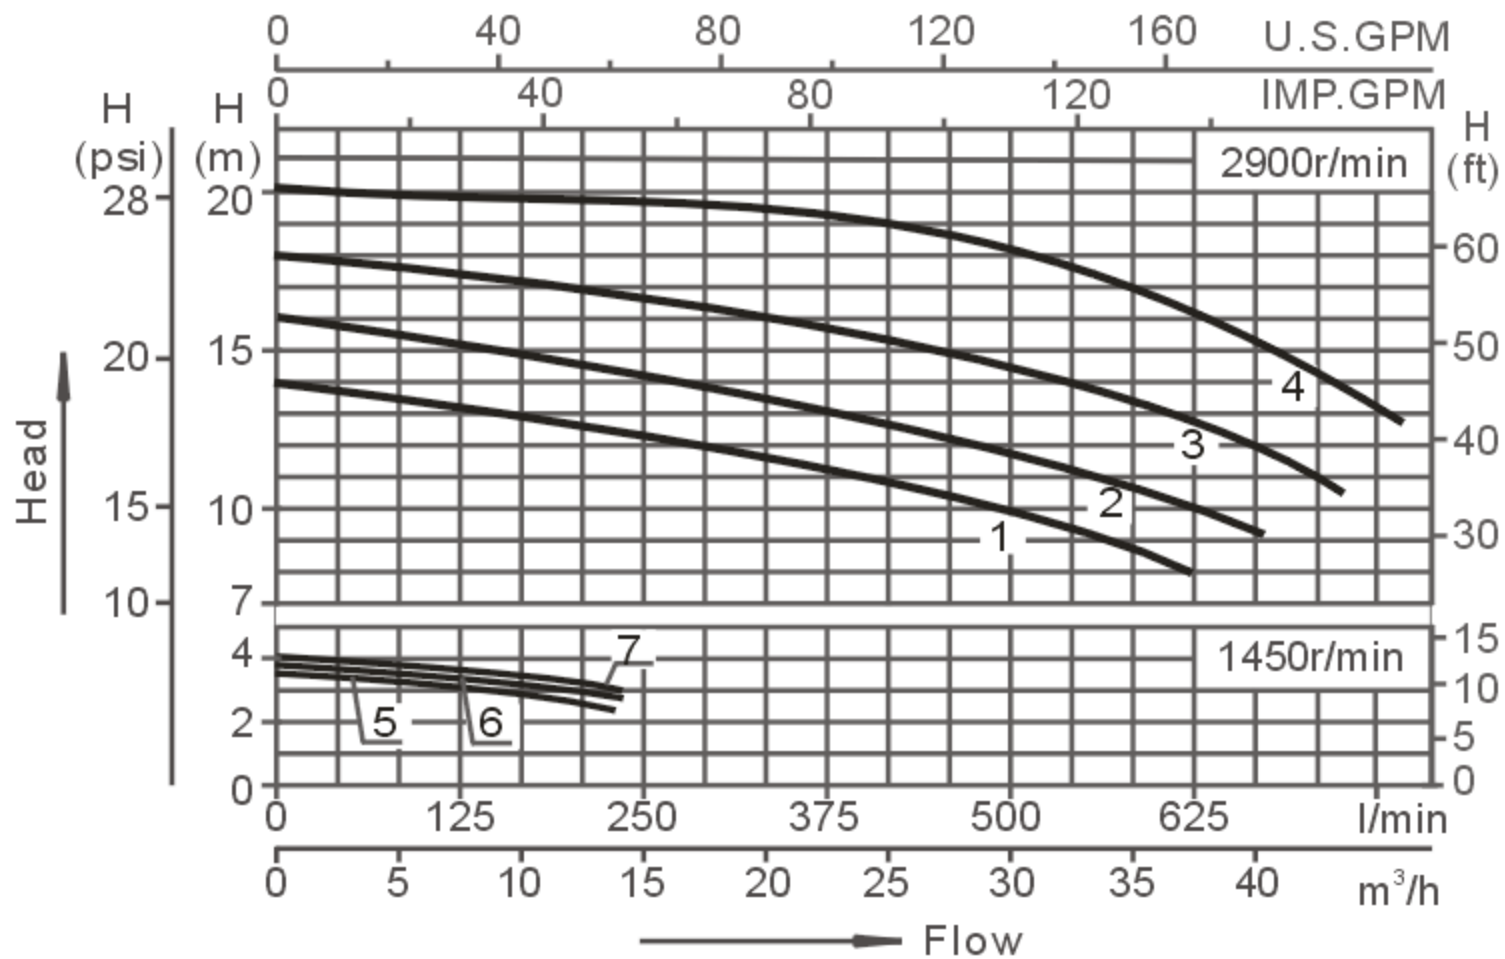

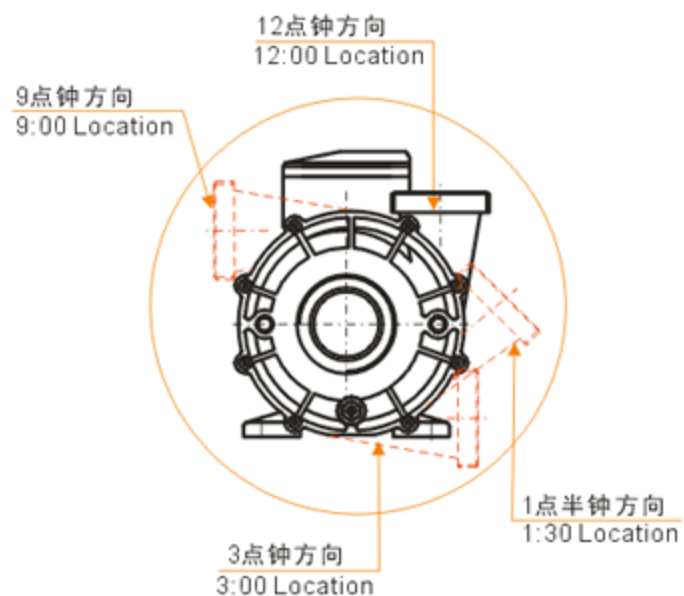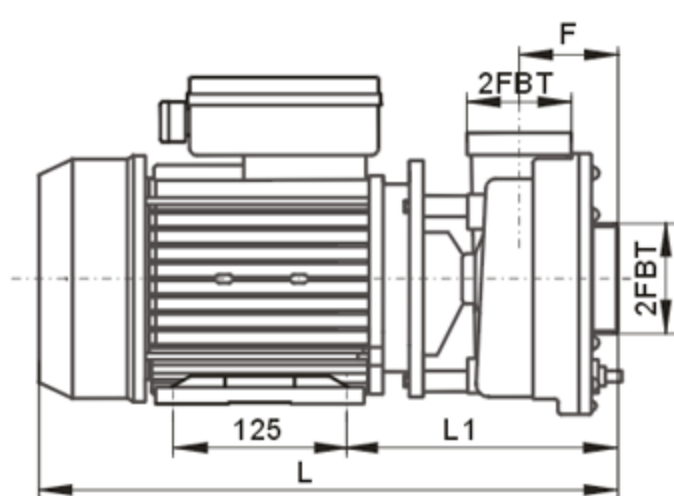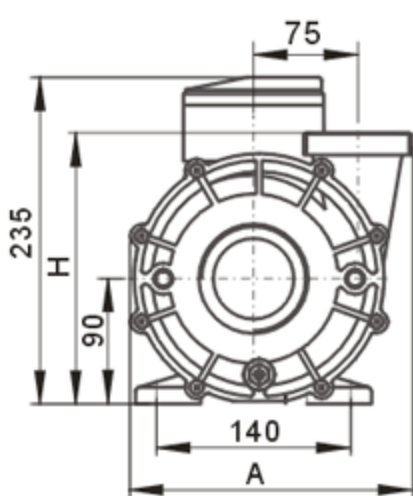

型号 Model	外形尺寸 Shape size (mm)				
	A	H	L	L1	F
WP200-I	202	197	416	197	73
WP250-I	202	197	416	197	73
WP300-I	202	197	416	197	73
WP400-I	211	210	421	200	75
WP200-II	202	197	434	197	73
WP250-II	202	197	434	197	73
WP300-II	202	197	434	197	73



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

序号 N.O.	名称 Name
1	接头螺母 Tie-in Nut
2	接 头 Tie
3	O形圈 O-Ring
4	注放水螺塞 Hexagon Screw
5	O形圈 O-Ring
6	十字盘头螺钉组合件 cross raised head screw assembling
7	泵 盖 Pump Cover
8	O形圈 O-Ring
9	叶 轮 Impeller
10	机械密封 Mechanical seal

序号 N.O.	名称 Name
11	泵 壳 Pump Casing
12	平垫圈 Plain washer
13	六角螺栓 Plastic spacer
14	电 机 Motor

